

Dual Wall Adhesive

- **Shrink Temp. 194°F**
- **Flame Retardant**
- **Versatile & Economical Termination Solution**
- **Resists Common Automotive Chemicals**
- **Easily Installs Over Connectors & Splices**
- **Excellent Electrical Properties**
- **Protects from Fluids, Moisture & Corrosion**


2:1 and 3:1 Dual Wall Adhesive Heatshrink Tubing

Dual wall adhesive lined polyolefin heatshrink tubing is ideal for producing strong, weather tight seals on any heatshrink installation. During the application of heat from a heat gun or other heat source, the inner adhesive wall melts and flows, creating an adhesion layer to ensure a snug fit to your harness or connector.

Adhesive lined heatshrink comes in 2:1 and 3:1 shrink ratio, and it is available in 4' sticks.



Seals and protects a wide variety of electrical applications, including wire splices, breakouts, and connectors-to-cable transitions.

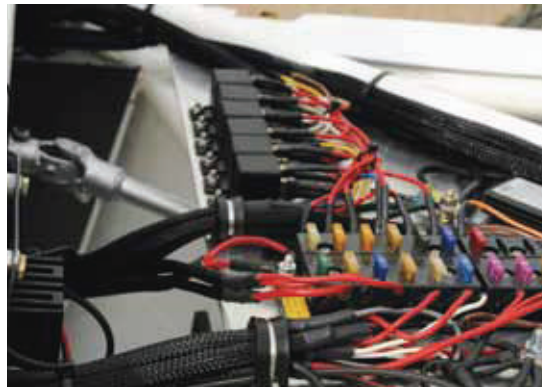

Shrinks to 1/2 it's original diameter

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4'Pcs.	Shop Box Put Up/4'Pcs.	Available Colors	Lbs/10Pcs.
1/8"	H2A0.13	3.2mm	1.6mm	250	25	BK,CL	0.17
1/4"	H2A0.25	6.4mm	3.2mm	250	25	BK,CL	0.32
3/8"	H2A0.38	9.6mm	4.8mm	250	25	WH,BK,RD	0.55
1/2"	H2A0.50	12.7mm	6.4mm	200	25	WH,BK,CL,RD	0.73
3/4"	H2A0.75	19.1mm	9.6mm	80	25	WH,BK,RD	1.15
1"	H2A1.00	25.4mm	12.7mm	50	25	WH,BK,RD	1.53
1 1/2"	H2A1.50	38.1mm	19.1mm	15	5	BK	2.50

Shrinks to 1/3 it's original diameter

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4'Pcs.	Shop Box Put Up/4'Pcs.	Available Colors	Lbs/10Pcs.
1/8"	H3A0.13	3.0mm	1.0mm	250	25	WH,BK,CL,RD	0.26
3/16"	H3A0.19	4.8mm	1.5mm	250	25	WH,BK,CL,RD	0.31
1/4"	H3A0.25	6.0mm	2.0mm	250	25	WH,BK,CL,RD	0.35
3/8"	H3A0.38	9.0mm	3.0mm	250	25	WH,BK,CL,RD	0.55
1/2"	H3A0.50	12.0mm	4.0mm	200	25	WH,BK,CL,RD	0.75
3/4"	H3A0.75	19.0mm	6.0mm	80	25	WH,BK,CL,RD	1.65
1"	H3A1.00	24.0mm	8.0mm	50	25	WH,BK,CL,RD	2.15
2"	H3A2.00	50.0mm	17.0mm	15	5	WH,BK,CL,RD	5.25

*Contact your Account Representative for heatshrink cutting & printing services.

